

D 150 RM
D 150 RMA
D 150 RMG
D 175 RMS



FullGrip® System exclusivo AUSA:
 Tracción integral por discos múltiples conectable electro-hidráulicamente desde el mando joystick.

Exclusive AUSA FullGrip® System:
 On demand 4WD connectable by means multiple discs with electro-hydraulic engagement from the joystick.

FullGrip® System de AUSA:
 4 RM sur demande au moyen de disques multiples avec connexion electro-hydraulique depuis le joystick.

AUSA FullGrip® System:
 Elektrohydraulisch, zuschaltbarer Allradantrieb – am Joystick zu betätigen.



www.ausa.com

AUSA Center, S.L.
 Ctra. de Vic Km 2.8
 08243 Manresa
 BARCELONA (ESPAÑA)
 Tel.: +34 93 874 73 11
 E-mail: ausa@ausa.com
www.ausa.com


AUSA Madrid Pol. Ind. Coslada - C. Marconi 15-17, 28823 Coslada - MADRID (ESPAÑA) - Tel.: +34 91 669 00 06 - E-mail: ausa.madrid@ausa.com
AUSA France Z.I. Saint Charles - Rue de Zürich, 66000 PERPIGNAN (FRANCE) - Tel: +33 (0) 4 68 54 38 97 - E-mail: ausa.france@ausa.com
AUSA Deutschland Tel.: +49 (0) 2384 9889905 - E-mail: ausa.deutschland@ausa.com
AUSA UK Tel.: +44 (0) 7970639988 - E-mail: ausa.uk@ausa.com
AUSA Brasil Avenida Belizario Ramos 2276 - Lages - SC, 88506-000 (BRASIL) - Tel.: +55 11 9 8786 6014 - E-mail: ausa.brasil@ausa.com
AUSAMéxico Calzada Vallejo 725 Del. Gustavo A. Madero - 07750 México D.F. (MÉXICO) - Tel.: +52 (55) 2166 9276 - E-mail: ausa.mexico@ausa.com
AUSA U.S. CORP. Tel.: +1 (917) 328 0770 - E-mail: ausa.us@ausa.com
AUSA Beijing Rep. Office Room 403, Moma Building, N.199 - Chaoyang bei road, Chaoyang District - 100026 BEIJING (CHINA)
 Tel.: +86 10 8598 7386 - E-mail: ausa.china@ausa.com



D 150 RM_1500 Kg
D 150 RMA_1500 Kg
D 150 RMG_1500 Kg
D 175 RMS_1750 Kg

DIMENSIONS (mm)	D 150 RM / x4	D 150 RMA / x4	D 150 RMG / x4	D 175 RMS / x4	D 175 RMS / x4 Power Max
A	1560	1560	1249	1560	1611
B	1310	1440	1455	1310	1310
C	1560	1560	1560	1560	1560
D	200	200	200	200	200
E	1110	1220	1335	1100	1040
F	2095	2095	2095	2095	2095
G	225	225	225	225	225
H	610	830	890	610	610
I	1440	1440	1440	1440	1440
J	280	280	280	280	280
K	2330	2550	2615	2330	2330
L	1855	2590	2600	1855	1795
M	200	440	490	200	140
N	480	1015	1070	480	420
O	-	1710	-	-	-
P	-	2135	-	-	-
Q	-	3285	-	-	-
R	-	-	-	1793	1733
S	-	-	-	3464	3464
T	1225	1225	1225	1225	1273
U	-	-	193	-	-

AUSA
www.ausa.com

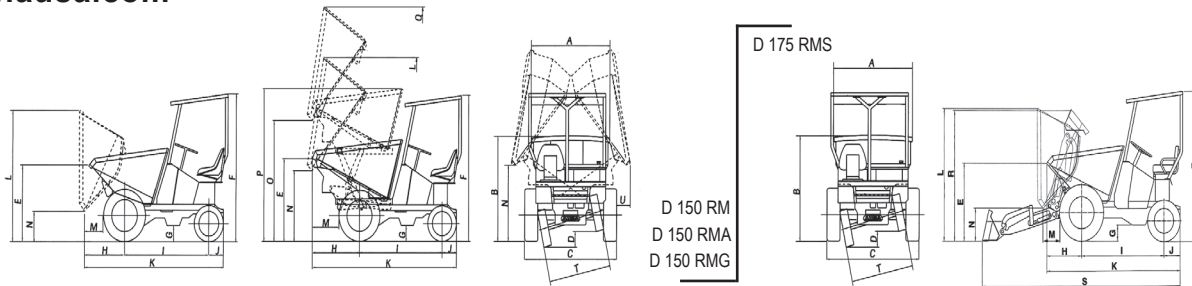

TECHNICAL SPECIFICATIONS

	D 150 RM / x4	D 150 RMA / x4	D 150 RMG / x4	D 175 RMS / x4	D 175 RMS / x4 Power Max
Load capacity (Kg)	1500				
Unloading system	Hidraulic	Hidraulic tipping	Hidraulic 180° rotating	Hidraulic, tilting shovel (140 l.)	Hidraulic, tilting shovel (140 l.)
Chassis	Rigid				
Hopper capacities (l)	Water	630	600	608	608
	Levelled	868	700	868	868
	Heaped	1047	900	1047	1047
Engine 1	Diesel	HATZ SUPRA 1D90Z			-
	Power acc./ DIN 70020 (KW/CV)	11.3 / 15.35			-
	N° of Cylinders	1			-
	Cooling system	Air			-
Engine 2	Diesel	KUBOTA D902 (OPTIONAL)			KUBOTA D902
	Power acc. SAE J 1995 (KW/CV)	12.1 / 16.44			12.1 / 16.44
	N° of Cylinders	3			
	Cooling system	Water			
Traction	4x2/4x4 (Multidisc slipping connecting device, oil-immersed, automatically disconnecting on 3rd and 4th gear)				
Transmission	Mechanical, with 4 forward gears and 4 reverse				
Clutch	Dry single-disc, W180 mm. Mechanically driven.				
Engine starting system	Electric				
Speed (max.) (Km/h)	22.5	22.5	22.5	22.5	20
Unladen weight (Kg)	900	1250	1200	1400	1400
Gradeability	Engine 1	30%	26%	26%	22%
	Engine 2	35%	30%	30%	26%
					45% 1 - 40% 2
Hydraulic circuit	Gear pump of 8cc. Working pressure 115 bar.	Gear pump of 8cc. Working pressure 150 bar.	Gear pump of 8cc. Working pressure 150 bar.	Gear pump of 8cc. Working pressure 140 bar.	Gear pump of 8cc. Working pressure 140 bar.
Tyres	Front	7.50x16"-8PR			27x8.5 - 15
	Rear	145SR-13" (4x2) / 6.5/80x12"-4PR (4x4)			23x8.5 - 12 TL 6 PR
External turning radius (mm)	3470 (4x2) / 3620 (4x4)			3620	
Steering	Hydraulic Working pressure 60 bar.				
Tank capacity (l)	Fuel	13.5			
	Hydraulic	16.5			
Service brake	Hydraulic on front axle				
Parking brake	Mechanical on front axle				
1) Load 1500 Kg					
2) Load 1750 Kg					
STANDARD EQUIPMENT	Anti vandal system Ergonomic seat Audible reverse warning				
OPTIONAL EQUIPMENT	Closed cabin with heating (only for Kubota engine) FOPS/ROPS Protective roof (Seat belt, rotating beacon, rear view mirror) ROPS driver protective arch Homologated lighting equipment Towing hitch Mechanical steering, Mechanical brakes (only for Hatz engine)				
Tyres	Front (Big Foot)	10.0/75-15.3 (4x4)			
	Rear (Big Foot)	23x8.50-12" TL 6PR (4x4)			
	Rear	5.00x12"-4PR (4X2)			